HOXTON

PORCELAIN - MATT OR BRUSHED

Inspired by Hoxton Natural Quartzite, this porcelain interpretation offers a delicate crystalline lattice and warm, creamy tones. The result is a timeless surface, offering the visual richness of stone in a versatile, porcelain format. Combine with the natural version of this material, manufactured from slab in our bespoke workshop.

V2

FOUR SEASONS

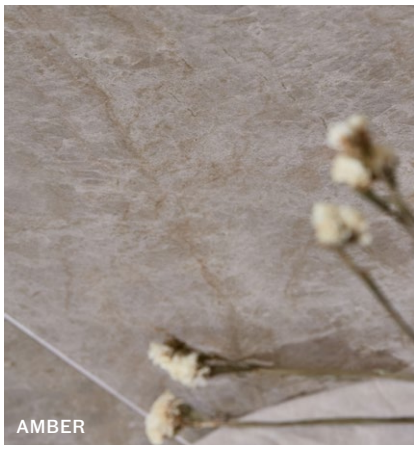
AMBER

AMBER LINEAR DÉCOR

FOUR SEASONS

LINEN

AMBER LINEAR DÉCOR

OPTION	FORMAT (CM)	SOLD BY	AVAILABILITY	NOTES
Linen Matt, Amber Matt	60 x 60 x 0.9	4 pieces (1.44m²)	Usually in stock	Suitable for interior walls and floors. Four Seasons not suitable for floors in wet areas.
Linen Matt, Amber Matt	60 x 120 x 0.9	2 pieces (1.44m²)	Usually in stock	
Amber Linear Décor Matt	60 x 120 x 0.9	2 pieces (1.44m²)	Usually in stock	
Four Seasons Brushed	60 x 120 x 0.9	2 pieces (1.44m²)	Usually in stock	

LINEN MATT
60 X 60 X 0.9CM

LINEN MATT
60 X 120 X 0.9CM

AMBER MATT
60 X 60 X 0.9CM

AMBER MATT
60 X 120 X 0.9CM

AMBER LINEAR DÉCOR MATT
60 X 120 X 0.9CM

FOUR SEASONS BRUSHED
60 X 120 X 0.9CM

TECHNICAL DATA

TEST	STANDARD	RESULT
Sizing	-	Nominal size: 60 x 60cm Final rectified size: 60 x 60cm Nominal size: 60 x 120cm Final rectified size: 60 x 120cm
Number of Faces	-	Amber Matt / Linen Matt 60 x 120 x 0.9cm: 24 Amber Matt / Linen Matt 60 x 60 x 0.9cm: 48 Amber Linear Décor Matt 60 x 120 x 0.9cm: 24 Four Seasons Décor Brushed 60 x 120 x 0.9cm: 24
Dimensional Tolerances	EN ISO 10545-2	Within standard tolerances
Water Absorption	EN ISO 10545-3	≤ 0.5%
Modulus of Rupture	EN ISO 10545-4	≥ 35N/mm^2
Breaking Strength	EN ISO 10545-4	>1300N
Deep Abrasion Resistance	EN ISO 10545-6	< 175mm^3
Superficial Abrasion Resistance	EN ISO 10545-7	2-5
Linear Thermal Expansion	EN ISO 10545-8	6.5 x 10-6°C
Thermal Shock Resistance	EN ISO 10545-9	Resistant
Moisture Expansion	EN ISO 10545-10	0.0mm/m
Frost Resistance	EN ISO 10545-12	Resistant
Chemical Resistance - Low Concentration	EN ISO 10545-13	B
Stain Resistance	EN ISO 10545-14	3
Resistance to Fire	EN 9239-1	A1
Slip Rating - Barefoot	DIN 51130	Amber Matt, Linen Matt: R9
Dynamic Coefficient of Friction	ANSI A137	>0.42

Rectified: YES ☑ NO ☐

For any further information or advice, please contact our team.

INSTALLATION, CARE & MAINTENANCE ADVICE

Please refer to the installation guides on our website.

UK CA

CA' PIETRA

CAPIETRA.COM