

Level-Dec EasyFit

A product specifically designed for vinyl installations

The patented **Level-Dec EasyFit** wetroom floor former from Impey has been continuously refined to deliver outstanding performance and reliability. Engineered to simplify installation, servicing, and long-term care, Level-Dec EasyFit supports vinyl flooring to create a **durable, longer-lasting wetroom solution**. Level-Dec EasyFit floor formers provide one of the **easiest and most dependable ways to achieve the correct gradient** for efficient water drainage in wetroom floors.


Key features

- Suitable for wooden and concrete subfloors
- Quickest and easiest floor formers to install on the market
- No under-boarding required*
- Can be cut with a diamond cutting blade
- Simple to drill, allowing additional screw fixing points where required


*For joists with centre spacing up to 415mm

Code	Length	Width	A	B
LDE8080GRY	800mm	800mm	320mm to 480mm	320mm to 480mm
LDE9090GRY	900mm	900mm	370mm to 530mm	370mm to 530mm
LDE1010GRY	1000mm	1000mm	420mm to 580mm	420mm to 580mm
LDE1275GRY	1200mm	750mm	295mm to 455mm	520mm to 680mm
LDE1290GRY	1200mm	900mm	370mm to 530mm	520mm to 680mm
LDE1212GRY	1200mm	1200mm	520mm to 680mm	520mm to 680mm
LDE1380GRY	1300mm	800mm	320mm to 480mm	570mm to 730mm
LDE1490GRY	1400mm	900mm	370mm to 530mm	620mm to 780mm
LDE1580GRY	1500mm	800mm	320mm to 480mm	670mm to 830mm
LDE1512GRY	1500mm	1200mm	520mm to 680mm	670mm to 830mm
LDE1775GRY	1700mm	750mm	295mm to 455mm	770mm to 930mm
LDE18590GRY	1850mm	900mm	370mm to 530mm	845mm to 1005mm


1:40 gradient across the whole surface down to the drain

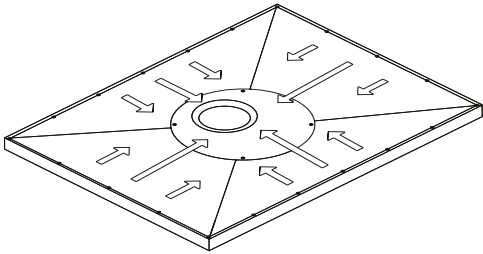

Registered design - EU Registration number 001 377 002, 001 346 621.




Trimmable up to smooth central area, see datasheet.



Please note all Impey wetroom floor formers and drains are now sold separately. Please refer to page 118 to view our compatible drain options.

Award-winning 360° rotating drain enables complete flexibility for outlet positioning to avoid joists and facilitate connection to existing drainage systems
Patented design (GB 2 431 341)

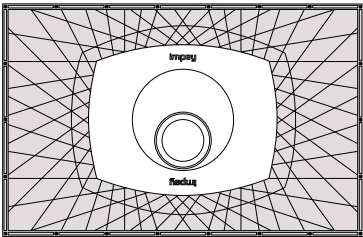

Trimmable area shown in grey.

Strong and rigid design with underside spoke pattern for increased rigidity, supporting up to 300kg

The **22mm depth** aligns with commonly specified flooring materials, ensuring a consistent level-access finish



Lifetime Guarantee



Manufactured in the UK