

Mantis

Ultra low-profile shower tray

At only 24mm high, our Mantis is the lowest profile shower tray in the Impey range, delivering near level-access without the need for a ramp and can be recessed into the floor for full level-access. Developed in consultation with Occupational Therapists and installers, it is ideal where a wetroom floor former cannot be installed.


The tray features a slip-resistant matte finish and a water-channelling tread pattern to maintain strong drainage performance.

Complete with waste and waterproofing upstand. Supplied with a horizontal gravity drain as standard or compatible with all other drain options, see page 138.

Flow rate up to 11 l/min. 90 mm drain aperture.

Key features

- Ultra-low 24mm height
- Can be recessed for full level-access
- Flow rate up to 11 l/min
- Supports up to 300kg (47 stone)
- Matte, slip-resistant surface classified to DIN 51097 Class B
- No ramp required for wheelchair access
- Available in 12 sizes, including bath replacement trays
- Compatible with all drain options
- Specially designed water-channelling tread pattern
- Compatible with electric and mixer showers

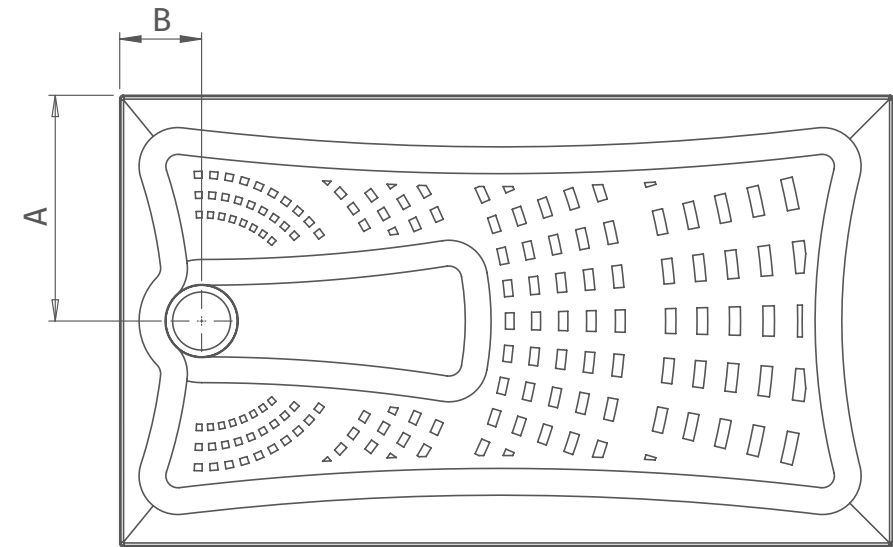

Code	Length	Width	Drain centre point	
			A	B
MTS9090	900mm	900mm	449mm	126mm
MTS100100	1000mm	1000mm	499mm	126mm
MTS12070	1200mm	700mm	349mm	126mm
MTS12080	1200mm	800mm	399mm	126mm
MTS13070	1300mm	700mm	349mm	126mm
MTS13080	1300mm	800mm	399mm	126mm
MTS14070	1400mm	700mm	349mm	126mm
MTS14080	1400mm	800mm	399mm	126mm
MTS15070	1500mm	700mm	349mm	126mm
MTS15080	1500mm	800mm	399mm	126mm
MTS17070	1700mm	700mm	349mm	126mm
MTS17080	1700mm	800mm	399mm	126mm

Slip resistance surface classified to DIN 51097 Class 'B'

No ramp required. At only 24mm, this tray can be accessed easily by wheelchair users



Supplied with a horizontal gravity drain

24mm low level-access tray



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code **US12350**



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens