

Slimline

Our most versatile high performance shower tray


The Slimline range is Impey’s most versatile low-level shower tray, offering industry-leading average flow rates of 33 litres per minute. At 35mm high, it balances accessibility with exceptional drainage performance.

Slimline trays can be recessed into the floor or installed with perimeter ramps. An offset waste position helps avoid underfloor obstructions.

Supplied with a horizontal gravity drain as standard or compatible with all other drain options, see page 138. Average flow rate of 33 l/min (tray size dependent). Pumped flow rate up to 8 l/min. 90 mm drain aperture.


Key features

- Low-profile 35mm height
- Average flow rate of 33 l/min (tray size dependent). Pumped flow rate up to 8 l/min
- Supports up to 250kg (39 stone)
- Slip resistance classified to DIN 51097 Class A
- Optional ramp kits (trimmable to suit tray size)
- Available in 9 sizes, including a bath replacement tray
- Offset waste to avoid underfloor obstructions
- Can be recessed into the floor
- Compatible with electric and mixer showers

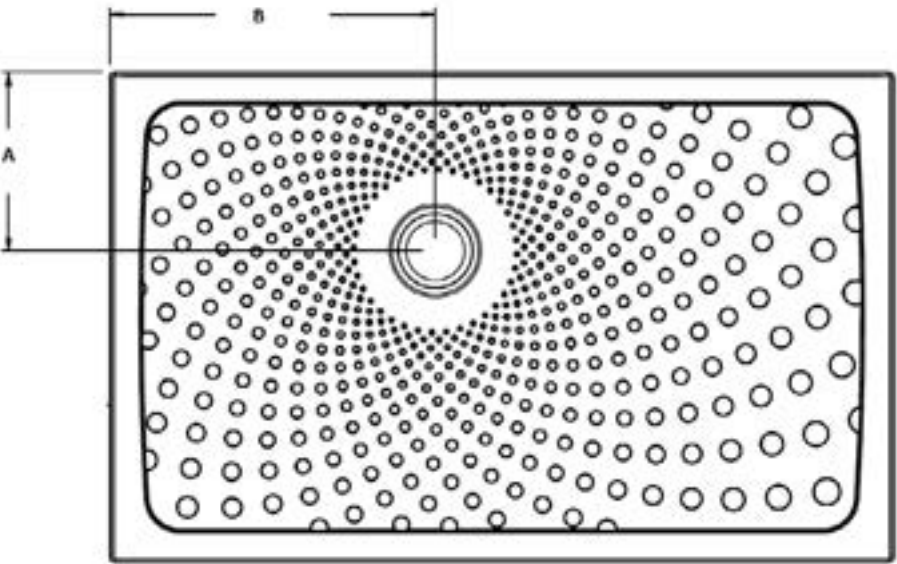

At 35mm high, and with optional ramp solutions,the Slimline tray provides easy access to those with limited mobility.

Code	Length	Width	Drain centre point	
			A	B
SL358080	800mm	800mm	298mm	298mm
SL359090	900mm	900mm	348mm	348mm
SL35100100	1000mm	1000mm	397mm	397mm
SL3512075	1200mm	750mm	273mm	498mm
SL3512090	1200mm	900mm	348mm	498mm
SL3513070	1300mm	700mm	248mm	548mm
SL3513075	1300mm	750mm	273mm	540mm
SL3515075	1500mm	750mm	273mm	648mm
SL3517075/CWEC	1700mm	750mm	273mm	498mm

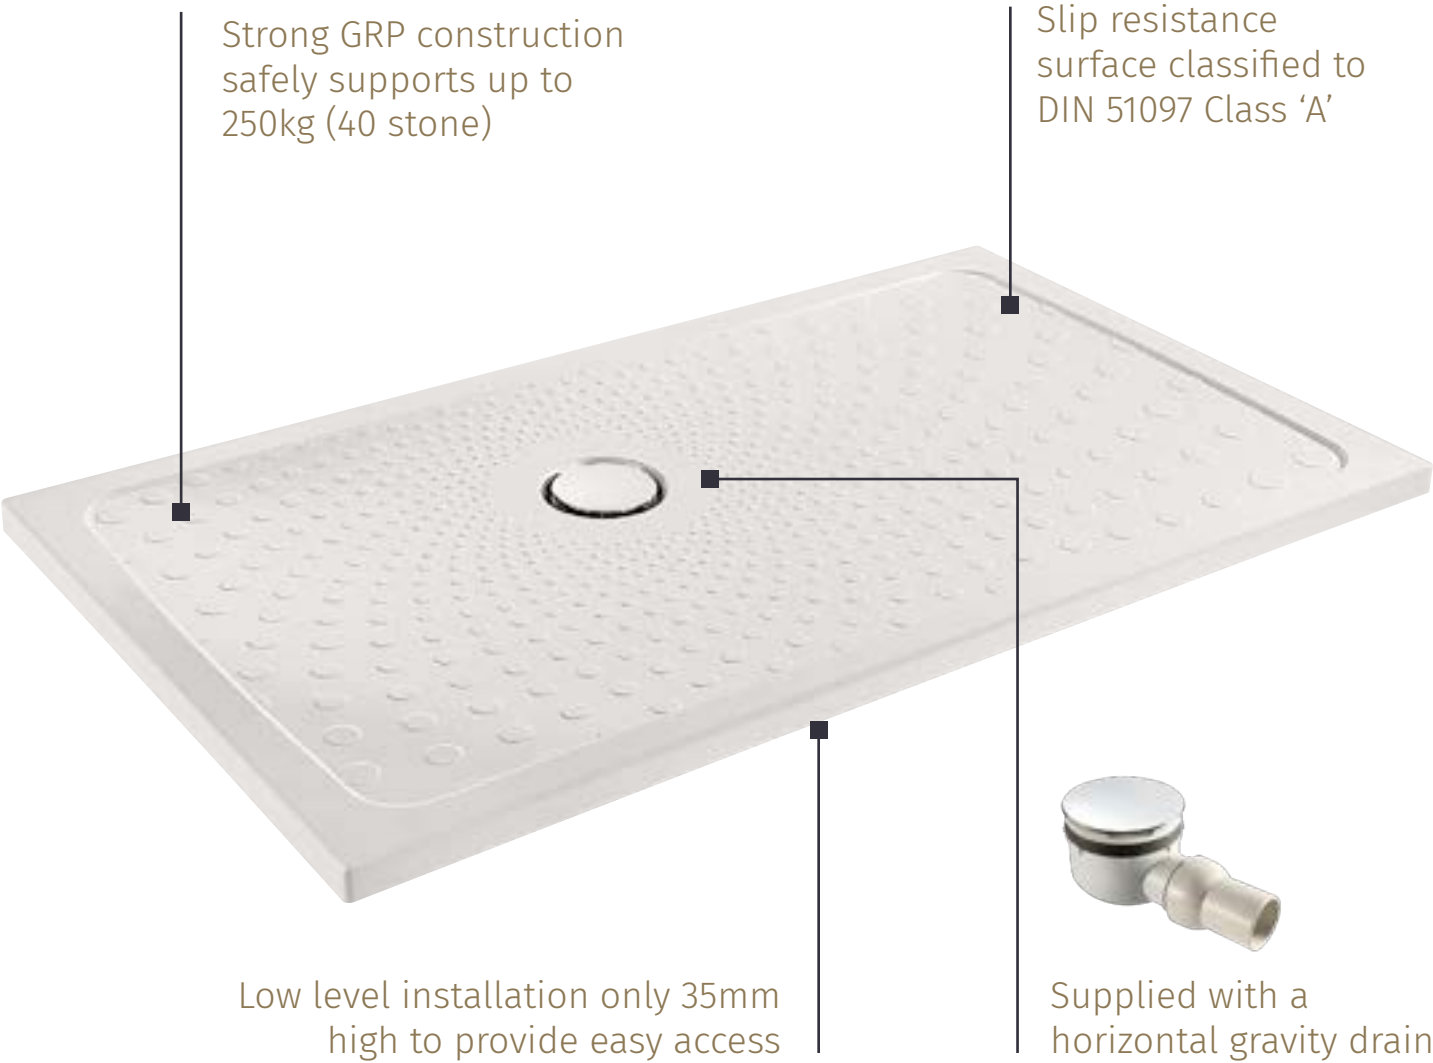

Access friendly ramp kits

Trimmable to suit tray size.

Code	Description
SL35/EC75	750mm Tray end cap
2MR	2000mm Ramp, 2x end caps
2MR KIT	2000mm Ramp, 2x ramp end caps, 1x corner section



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code US12350

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test

Lifetime Guarantee

CE tested to BS EN 14527

Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens