

DA 2578

Extractor unit

with LED lighting and push-button controls for convenient operation.



- Customised kitchen design – fully integrated in 702 mm width
- Unique user convenience – Con@ctivity
- Powerful – 600 m³/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover



EAN: 4002515978276 / Material number: 10851350 /
Old Material Number: 28257855GB

General information	
Model identifier	DA 2578
Manufacturer material number	10851350
EAN number	4002515978276
Marketing class	Gold
Construction type	
Integrated extractor	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 15-P
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Power levels (number without Booster level)	3
Controls	Light-touch switches with LEDs
Miele@mobile app	•
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Efficiency	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	51.7
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	2 x 3 W
Light intensity in lx	300 lx
Colour temperature in K	3000 Kelvin

DA 2578

Extractor unit

with LED lighting and push-button controls for convenient operation.



EAN: 4002515978276 / Material number: 10851350 /
Old Material Number: 28257855GB

Fan	
Dual-action fan	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	250
Air throughput in Level 2 (m ³ /h) according to EN 61591	300
Air throughput in Level 3 (m ³ /h) according to EN 61591	360
Air throughput in Booster level (m ³ /h) according to EN 61591	600
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	51.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	67.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	52.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	200
Air throughput in Level 2 (m ³ /h) according to EN 61591	250
Air throughput in Level 3 (m ³ /h) according to EN 61591	320
Air throughput in Booster level (m ³ /h) according to EN 61591	530
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	55.0
Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3	72.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	59.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	63.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	44.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	57.0
Safety	
Safety switch-off	•
Technical data	
Minimum height above electric hobs in mm	450
Canopy width in in. (mm)	702
Canopy height in in. (mm)	50

DA 2578

Extractor unit

with LED lighting and push-button controls for convenient operation.



EAN: 4002515978276 / Material number: 10851350 /

Old Material Number: 28257855GB


Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
---	-----

Net weight in kg	11.6
Depth of hood canopy in in. (mm)	402
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.22
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Combination with WiFi-enabled Miele hob	recommended
Accessories included	
Non-return flap	•

DA 2578

Extractor unit

with LED lighting and push-button controls for convenient operation.

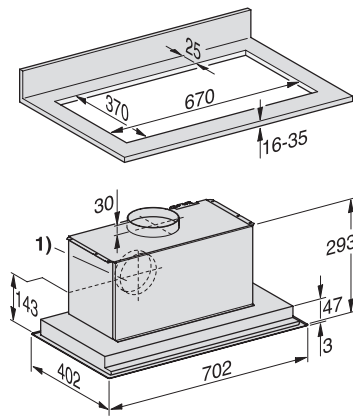

DA2578 (Installation drawing)

1) Vent connection alternatively to rear, You will find further detailed measurements in the instructions for use!