

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with LED lighting and touch control for easy operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 640 m³/h in Booster level
- Pleasantly quiet – Miele Silence package
- Efficient filtration- 10-ply stainless-steel grease filter



EAN: 4002516585275 / Material number: 12050610 /
Old Material Number: 28669851GB

General information	
Model identifier	DA 6698 W Purist. Ed.6000
Manufacturer material number	12050610
EAN number	4002516585275
Marketing class	Platinum
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Booster levels	1
Silence package	•
Smart Extras	
RemoteUpdate	•
Push notifications	•
Smart Home Integration	•
Smart Extras	
Alexa voice control	•
Google voice control	•
Efficiency	
Energy efficiency class (A+++ – D)	A++
PowerManagement system	•
Annual energy consumption in kWh/year	24.6
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in lx	670 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action fan	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	200
Air throughput in Level 2 (m ³ /h) according to EN 61591	300
Air throughput in Level 3 (m ³ /h) according to EN 61591	400
Air throughput in Booster level (m ³ /h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with LED lighting and touch control for easy operation.



EAN: 4002516585275 / Material number: 12050610 /

Old Material Number: 28669851GB

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	63.0
---	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	21.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	29.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
---	------

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	110
--	-----

Air throughput in Level 2 (m³/h) according to EN 61591	185
--	-----

Air throughput in Level 3 (m³/h) according to EN 61591	315
--	-----

Air throughput in Booster level (m³/h) according to EN 61591	460
--	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45.0
--	------

Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3	72.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	63.0
--	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
--	------

Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	57.0
--	------

Safety

Safety switch-off	•
-------------------	---

Single-ply safety glass (ESG)	•
-------------------------------	---

Technical data

Overall hood height for extraction mode and external in mm	710–1030
--	----------

Overall height for recirculation mode cooker hoods in mm	840–1160
--	----------

Overall height for vented and external min. in mm	710
---	-----

Overall height for extraction mode and external mode cooker hoods max. in mm	1030
--	------

Overall height for recirculation min. in mm	840
---	-----

Overall height for recirculation mode cooker hoods max. in mm	1160
---	------

Minimum height above electric hobs in mm	450
--	-----

Canopy width in in. (mm)	898
--------------------------	-----

Canopy height in in. (mm)	85
---------------------------	----

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with LED lighting and touch control for easy operation.



EAN: 4002516585275 / Material number: 12050610 /

Old Material Number: 28669851GB

Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
---	-----

Net weight in kg	26.0
Depth of hood canopy in in. (mm)	500
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50

Installation notes

Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•


Accessories included

Non-return flap	•
-----------------	---

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with LED lighting and touch control for easy operation.

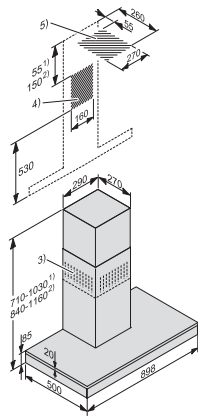

DA 6698 W, CLST (Installation drawing)

1. Extraction, 2. Recirculation, 3 Ventilation grilles at the top for recirculation, 4. + 5. Vent cut-out positions (Area 5 not required for recirculation)