

# Aqua-Dec Linear 2™

Alcove-ready, simple installation

Aqua-Dec Linear 2 is designed for **corner or alcove installations**, using two gradients to direct water efficiently towards the drain without requiring diagonal tile cuts.


Now trimmable, it offers additional flexibility on site while maintaining a clean, structured tile layout. Please note where the the raised edge(s) meet a wall, the wetroom former must be rebated into the wall(s).

**Available in 4 sizes**, all Aqua-Dec Linear floor formers have a 1 in 40 gradient on average and a maximum flow rate of 35-40 l/m.

Key features


- Ideal for corner or alcove installations
- Two gradients leading to the drain
- No diagonal tile cuts required
- 22mm thick
- 600mm linear drain
- Drain positioned 244mm from the wall
- Trimmable (see trimming guidance)
- Suitable for timber or concrete floors
- Underboarding with 18mm plyboard required
- Two available sump positions to help avoid pipework and joists\*

\*Please refer to dimensions B and C on the diagram below



Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to pages 40-45 to view our compatible drain options.

| Code     | Length | Width  | Drain | Drain centre point |       |       |       |
|----------|--------|--------|-------|--------------------|-------|-------|-------|
|          |        |        |       | A                  | B     | C     | D     |
| AD2L9090 | 900mm  | 900mm  | 600mm | 270mm              | 367mm | 367mm | 654mm |
| AD2L1010 | 1000mm | 1000mm | 600mm | 270mm              | 367mm | 367mm | 654mm |
| AD2L1290 | 1200mm | 900mm  | 600mm | 270mm              | 367mm | 367mm | 654mm |
| AD2L1490 | 1400mm | 900mm  | 600mm | 270mm              | 367mm | 367mm | 654mm |

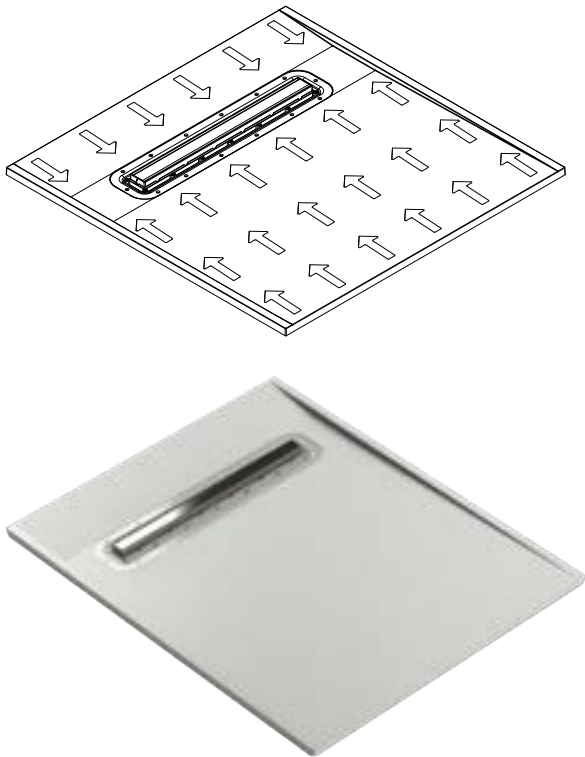

Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK