

Mendip

Gravity shower tray

Our Mendip shower tray provides a robust gravity drainage solution for unbreachable floors. With a tray depth of 100mm, it houses a fitted waste trap beneath the tray, eliminating the need to recess pipework into the floor.

Designed to be fully self-supporting, the Mendip does not require bedding down, and offers multiple waste outlet positions to suit site conditions.

Maximum flow rate of 10 l/min. The drain has a 40mm outlet, a 50mm water seal and the tray has a 50mm drain aperture.

Available with a sloping access ramp or half-step to improve accessibility where required. Our 1850mm trays are trimmable to 1250mm length, including 50mm end cap (comes with 2x end caps).

Mendip trays are ideal for multi-storey properties and installations where above-floor drainage is required.


Key features

- Strong 100mm tray depth
- Flow rate up to 10 l/min
- Supports up to 250kg (39 stone)
- Slip resistance classified to DIN 51097 Class A
- Compatible with access ramp
- Available in 7 sizes including cut-to-length bath replacement options
- Exit pipework from any side of the tray
- Factory-fitted waste with swivel outlet
- Gravity drainage solution or D.Trap for pumped waste
- Compatible with electric and mixer showers
- 50mm water seal compliant with Building Regulations
- Inspection cover

Code	Length	Width	Drain centre point	
			A	B
MEN501/C	900mm	900mm	180mm	450mm
MEN601/C	1000mm	1000mm	180mm	500mm
MEN101/C	1250mm	710mm	180mm	625mm
MEN201/C	1250mm	830mm	180mm	625mm
MNE301/C	1500mm	710mm	180mm	750mm
MEN401/C	1500mm	830mm	180mm	750mm
MEN701/C	1850mm	710mm	180mm	925mm



900mm Ramp
Code MEN/R01

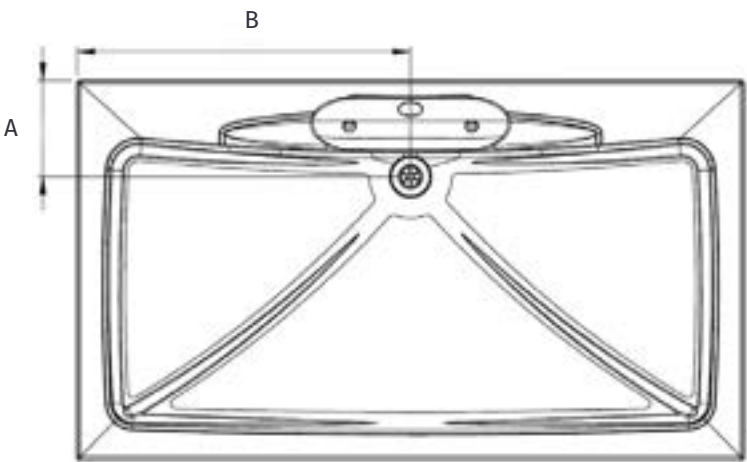

The Mendip tray is available with an optional ramp to allow east of access for those with limited mobility.

Slip resistance classified to DIN 51097 Class ‘A’

Supplied with a factory fitted waste trap with swivel outlet for drainage positioning



Tray depth of 100mm

Robust construction, supporting up to 250kg



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code US12350



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens